

*Necessary preliminary tasks:*

- Open rear lid.
- Remove convertible top compartment base

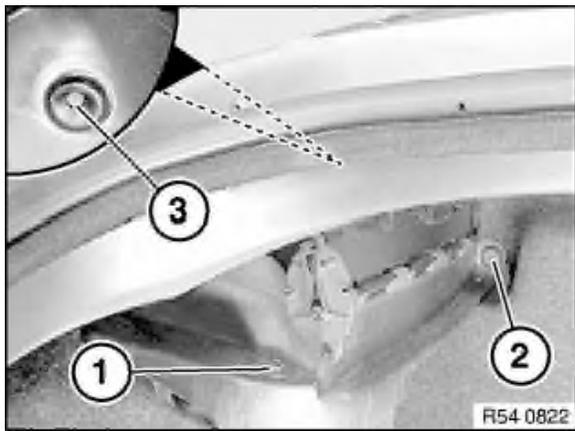

Release screws (1 and 2) and remove expansion rivet (3).

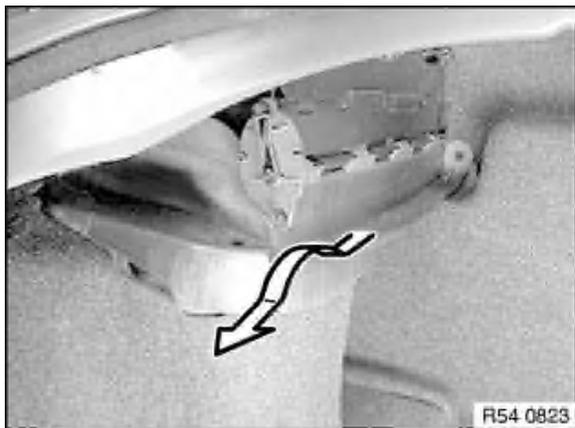

Feed out mounting towards rear top over spring strut cap.

*Installation:*

Feed in mounting under funnel.